FIRST

SLIM

מפרט טכני

FIRST SLIM


דפי מפרט והתקנה לבעלי מקצוע

טכנולוגיה פורצת דרך.

FIRST


SLIM
בחירת הדגם ומעבר למפרט הטכני

לחצו על הכרטיס כדי לעבור למידות ולהוראות ההתקנה.

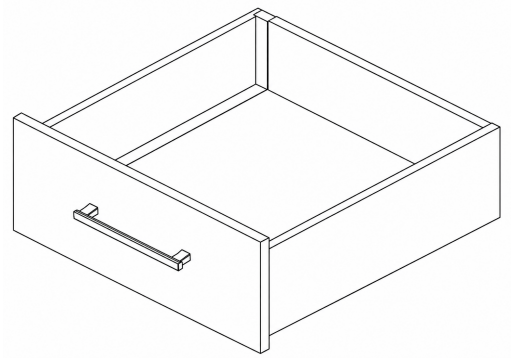


SLIM 120 | **חזית מלאה** | **P. 5-6**

גובה דופן: 120 מ״מ

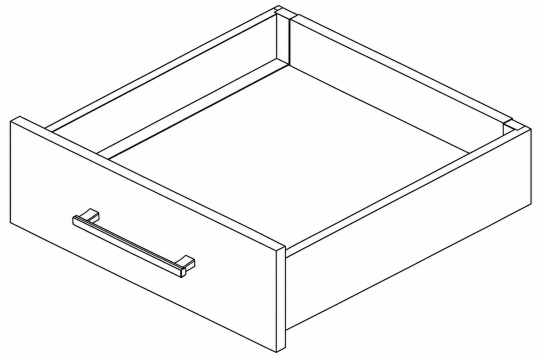


SLIM 90 | **חזית מלאה** | **P. 3-4**

גובה דופן: 90 מ״מ

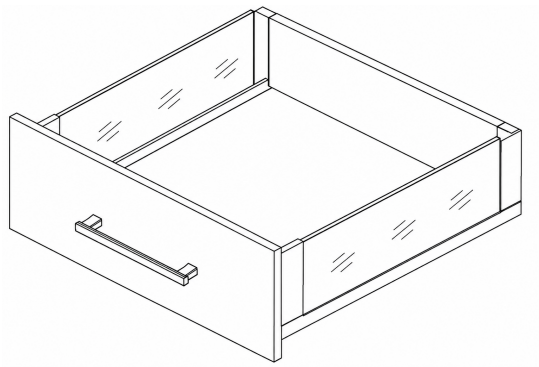


SLIM 176 | **דופן זכוכית** | **P. 9-10**

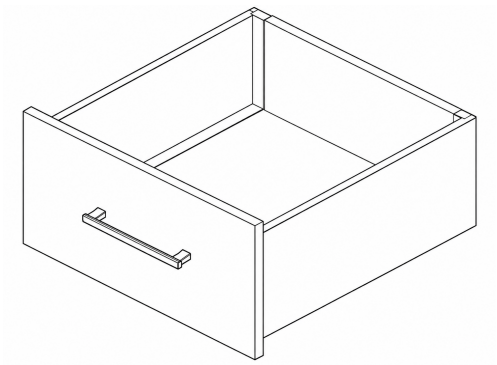


SLIM 171 | **חזית מלאה** | **P. 7-8**

גובה דופן: 171 מ״מ

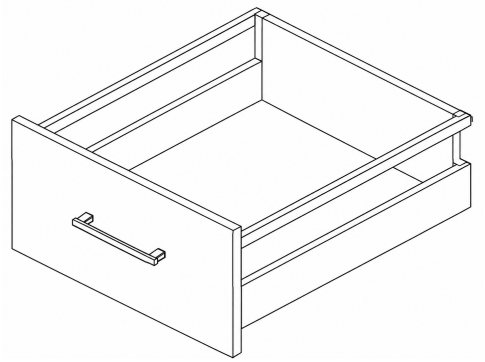


SLIM | **דופן צד - מוט** | **P. 13-14**

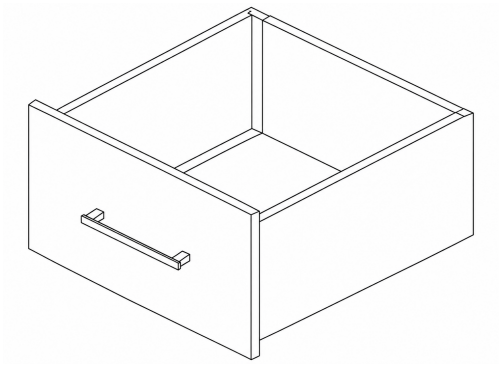


SLIM 203 | **חזית מלאה** | **P. 11-12**

גובה דופן: 203 מ״מ

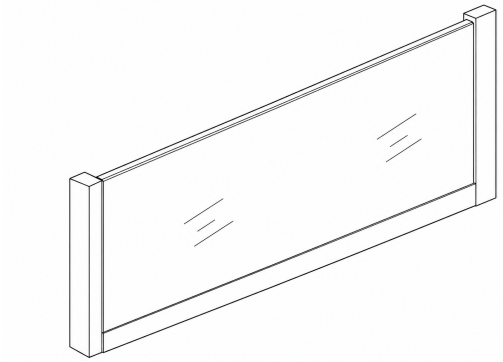

SLIM | **חזית פנים - זכוכית** | **P. 16-17**

בהתאמה לרוחב הארון

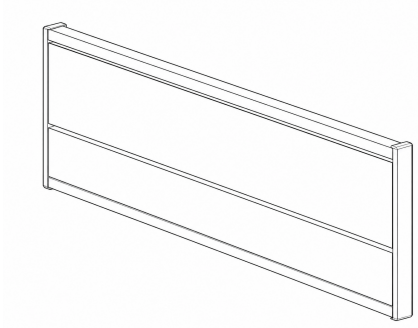


SLIM | **חזית פנים - מלאה** | **P. 15**

בהתאמה לרוחב הארון

שמות הדגמים מסחריים; יש לעבוד לפי המידות המופיעות בשרטוטים.

Silent Drawer System


Modul Box Assembly Instruction

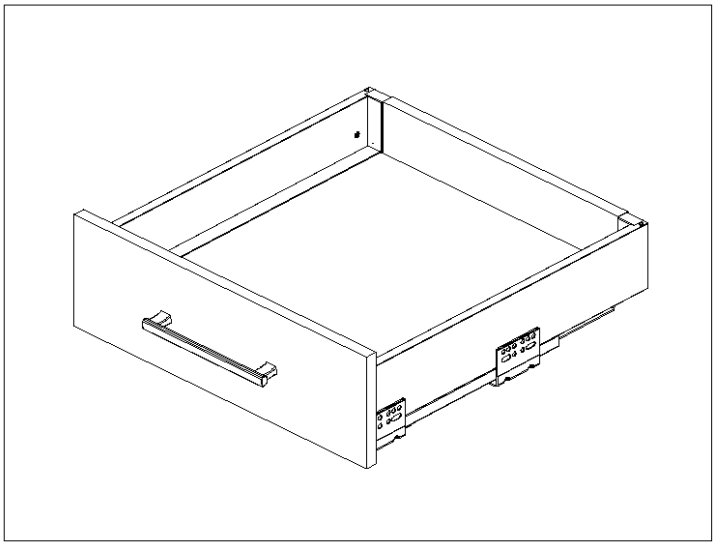


Special Features:

- Length:270.300,350,400,450,500,550mm.
- The drawer side-board is 88mm high.
- Drawer width can be designed freely with automatic error adjustment.
- Hidden full pullout silencing sliding skid can bear 35kg and enjoys
- excellent stability and quite and smooth sliding performance. Quick installation and dismantle.
- Newly-designed built-in damper is free from reinstallation and ensures soft and smooth drawer movements.


Basic length	Internally usable drawer depth	Minimum installation depth of drawer	Minimum installation height
270mm	244mm	270mm	113mm
300mm	274mm	300mm	113mm
350mm	324mm	350mm	113mm
400mm	374mm	400mm	113mm
450mm	424mm	450mm	113mm
500mm	474mm	500mm	113mm
550mm	524mm	550mm	113mm

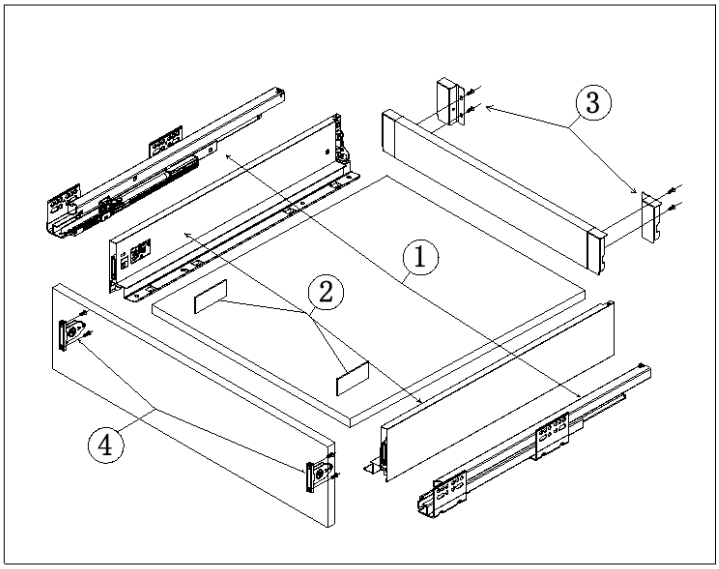


1. Guide Left/Right Length: 270mm 300mm 350mm 400mm 450mm 500mm 550mm



2.Drawer Side & Decorative Cap Left/Right Length: 270mm 300mm 350mm 400mm 450mm 500mm 550mm




3.Back connector Left / Right



4.Front connector Left / Right



Technology pivot:
Bottom and Back Panel Measurement
16MM Density Panel

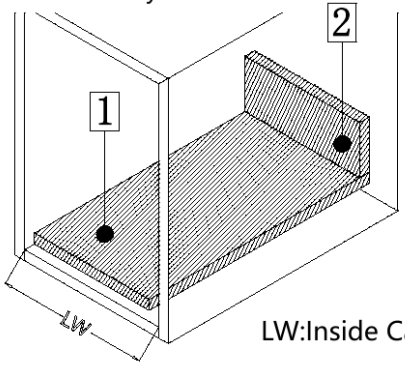


LW:Inside Cabinet Width

1 Bottom panel width=Inside Cabinet Width(LW)-75±0.5
Bottom panel length=Runner length(NL)-10MM


2 Back panel height= 68MM
Back panel width=Inside Cabinet Width(LW)-87±0.5

Runner Installation(mm)

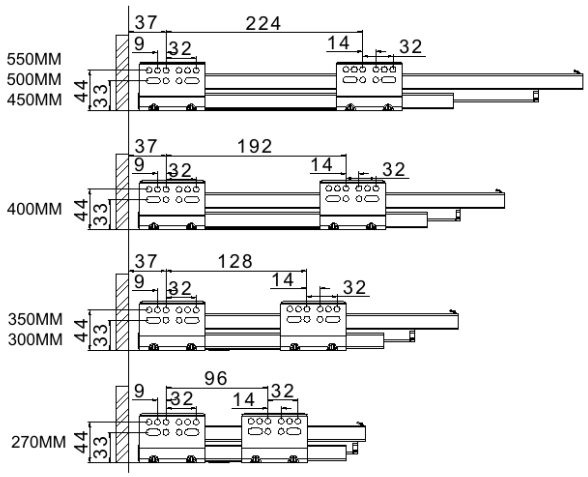


Basic length(NL):270/300/350/400/450/500/550mm

Inside Cabinet Dimension




Front Panel Mounting Positions

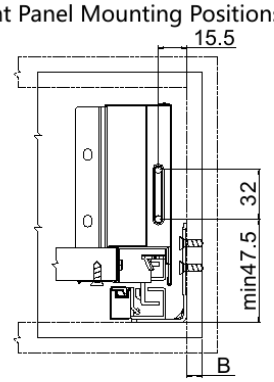


B Side overlay(user-defined)

Front Fixing Brackets Positions

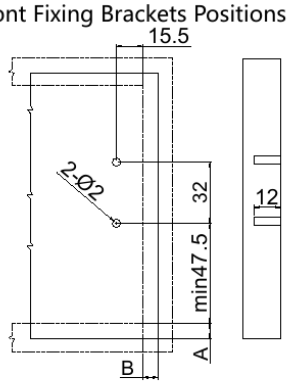


A.B Side overlay(user-defined)


Back Panel Mounting Positions



Front fixing brackets mounting




1 Installed panel emember hat tighten the fixing screw




Front panel removing


1 Take out the plastic cover




1 Loosen the fastening screws
2 Rotation to dismantle the panel




Front panel height adjustment: ±2mm




Front panel side adjustment: right1mm



Front panel side adjustment: left1mm





Back Adjustment





Twist the adjustment core to adjust the front and rear tilt of the panel

Mounting the drawer













Installing the drawer









Removing the drawer




Push the metal spring part from the panel & pull out

Function of the damper








Silent Drawer System


Modul Box Assembly Instruction

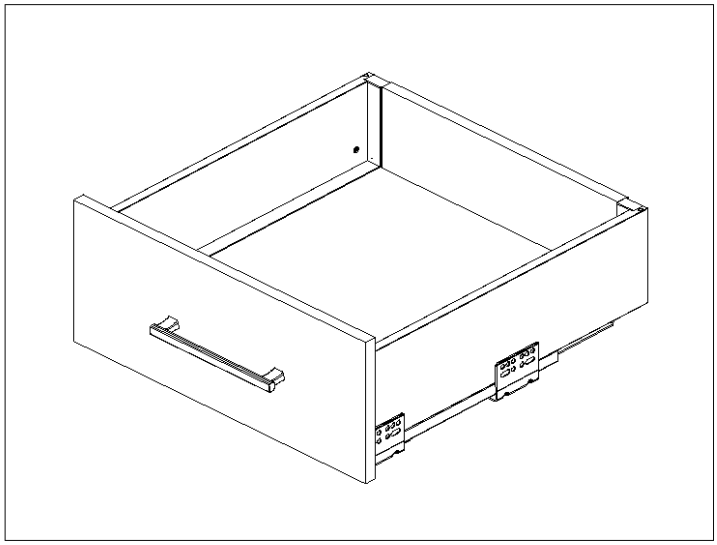


Special Features:

- Length:270,300,350,400,450,500,550mm.
- The drawer side-board is 120mm high.
- Drawer width can be designed freely with automatic error adjustment.
- Hidden full pullout silencing sliding skid can bear 35kg and enjoys
- excellent stability and quite and smooth sliding performance. Quick installation and dismantle.
- Newly-designed built-in damper is free from reinstallation and ensures soft and smooth drawer movements.


Basic length	Internally usable drawer depth	Minimum installation depth of drawer	Minimum installation height
270mm	244mm	270mm	145mm
300mm	274mm	300mm	145mm
350mm	324mm	350mm	145mm
400mm	374mm	400mm	145mm
450mm	424mm	450mm	145mm
500mm	474mm	500mm	145mm
550mm	524mm	550mm	145mm

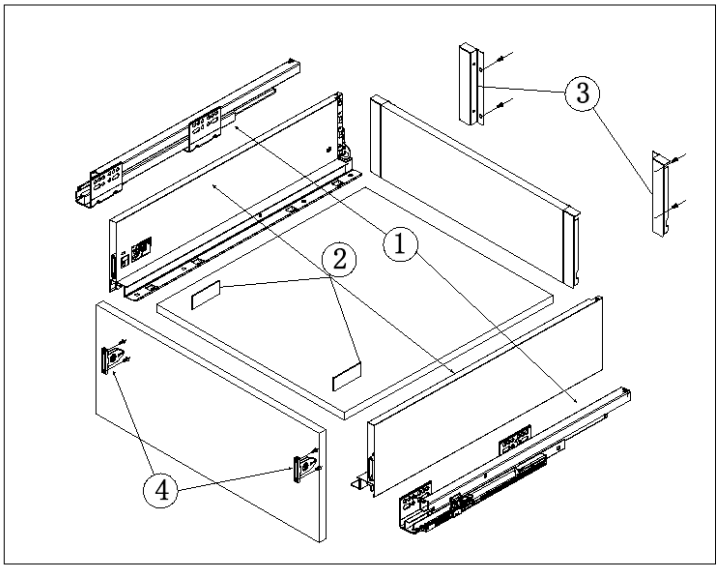


1. Guide Left/Right Length: 270mm 300mm 350mm 400mm 450mm 500mm 550mm



2.Drawer Side & Decorative Cap Left/Right Length: 270mm 300mm 350mm 400mm 450mm 500mm 550mm




3.Back connector Left / Right



4.Front connector Left / Right



Technology pivot:
Bottom and Back Panel Measurement
16MM Density Panel

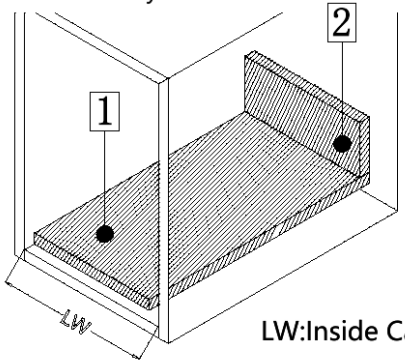


LW:Inside Cabinet Width

1 Bottom panel width=Inside Cabinet Width(LW)-75±0.5
Bottom panel length=Runner length(NL)-10MM


2 Back panel height= 100MM
Back panel width=Inside Cabinet Width(LW)-87±0.5

Runner Installation(mm)

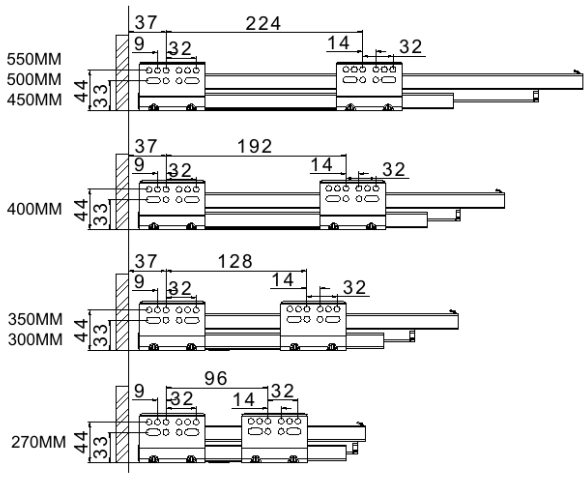


Basic length(NL):270/300/350/400/450/500/550mm

Inside Cabinet Dimension

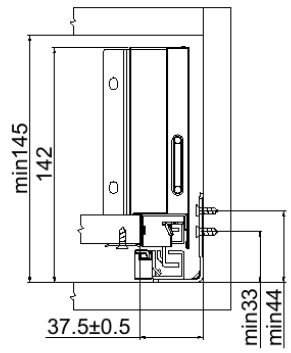


Front Panel Mounting Positions

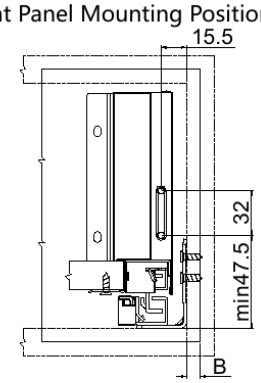


B Side overlay(user-defined)

Front Fixing Brackets Positions

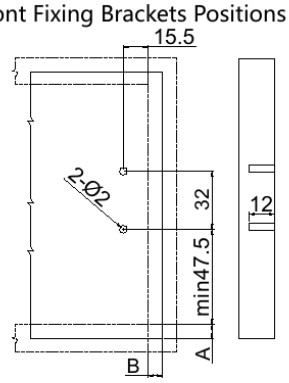


A.B Side overlay(user-defined)


Back Panel Mounting Positions



Front fixing brackets mounting




1 Installed panel emember hat tighten the fixing screw




Front panel removing


1 Take out the plastic cover




1 Loosen the fastening screws
2 Rotation to dismantle the panel




Front panel height adjustment: ±2mm




Front panel side adjustment: right1mm



Front panel side adjustment: left1mm





Back Adjustment





Twist the adjustment core to adjust the front and rear tilt of the panel

Mounting the drawer













Installing the drawer









Removing the drawer




Push the metal spring part from the panel & pull out


Function of the damper







Silent Drawer System

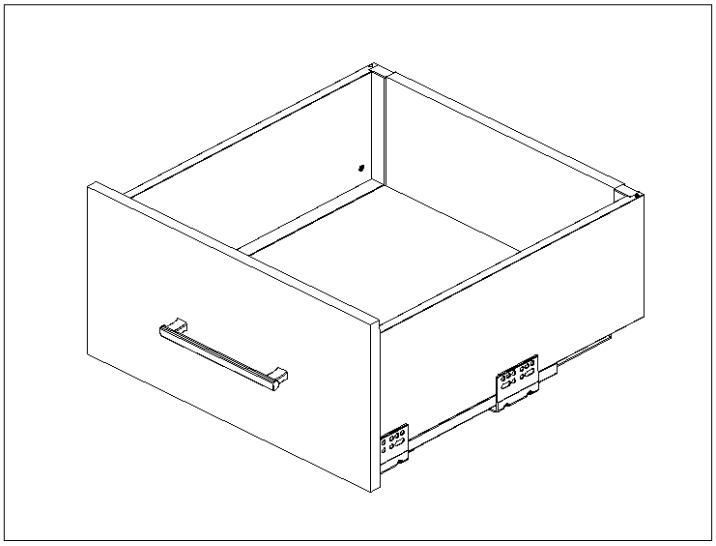


Modul Box Assembly Instruction


Special Features:

- Length:270,300,350,400,450,500,550mm.
- The drawer side-board is 171mm high.
- Drawer width can be designed freely with automatic error adjustment.
- Hidden full pullout silencing sliding skid can bear 35kg and enjoys
- excellent stability and quite and smooth sliding performance. Quick installation and dismantle.
- Newly-designed built-in damper is free from reinstallation and ensures soft and smooth drawer movements.


Basic length	Internally usable drawer depth	Minimum installation depth of drawer	Minimum installation height
270mm	244mm	270mm	195mm
300mm	274mm	300mm	195mm
350mm	324mm	350mm	195mm
400mm	374mm	400mm	195mm
450mm	424mm	450mm	195mm
500mm	474mm	500mm	195mm
550mm	524mm	550mm	195mm

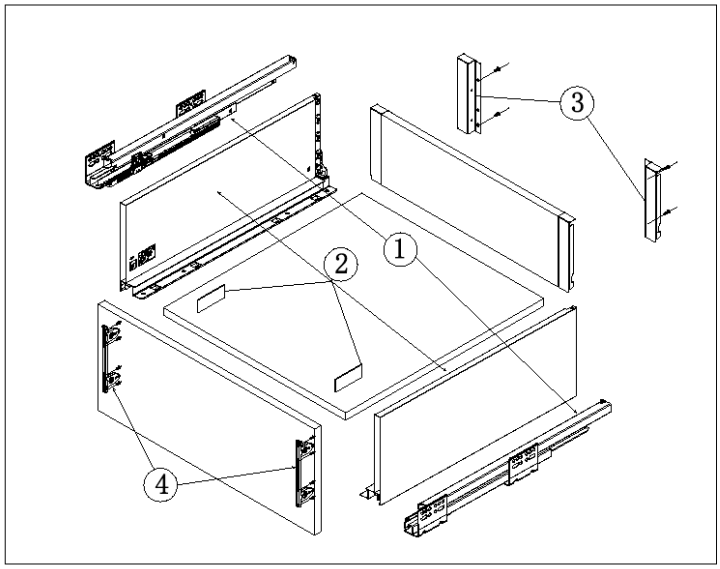


1. Guide Left/Right Length: 270mm 300mm 350mm 400mm 450mm 500mm 550mm



2.Drawer Side & Decorative Cap Left/Right Length: 270mm 300mm 350mm 400mm 450mm 500mm 550mm




3.Back connector Left / Right



4.Front connector Left / Right



Technology pivot:
Bottom and Back Panel Measurement
16MM Density Panel

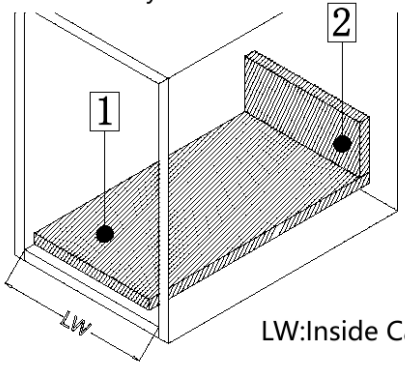


LW:Inside Cabinet Width

1 Bottom panel width=Inside Cabinet Width(LW)-75±0.5
Bottom panel length=Runner length(NL)-10MM


2 Back panel height=151MM
Back panel width=Inside Cabinet Width(LW)-87±0.5

Runner Installation(mm)

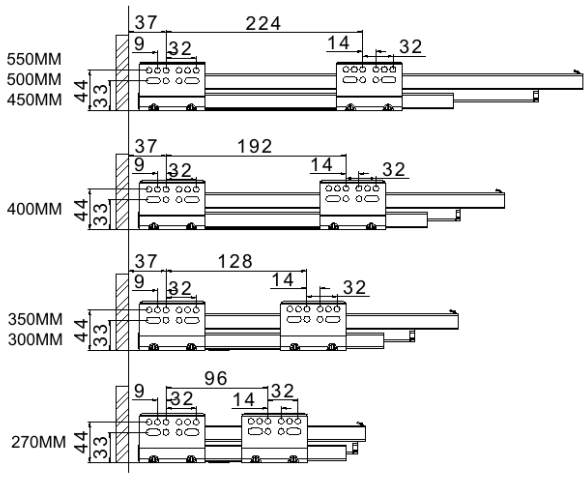


Basic length(NL):270/300/350/400/450/500/550mm

Inside Cabinet Dimension

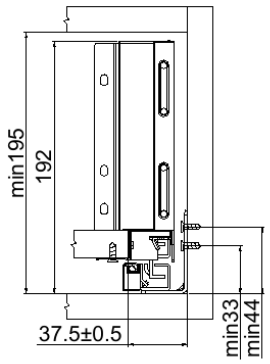


Front Panel Mounting Positions

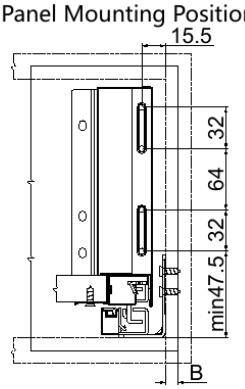


B Side overlay(user-defined)

Front Fixing Brackets Positions

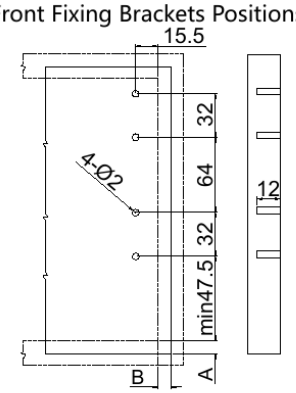


A.B Side overlay(user-defined)


Back Panel Mounting Positions



Front fixing brackets mounting




1 Installed panel emember hat tighten the fixing screw




Front panel removing


1 Take out the plastic cover




1 Loosen the fastening screws
2 Rotation to dismantle the panel




Front panel height adjustment: ±2mm




Front panel side adjustment: right1mm



Front panel side adjustment: left1mm





Back Adjustment





Twist the adjustment core to adjust the front and rear tilt of the panel

Mounting the drawer













Installing the drawer









Removing the drawer




Push the metal spring part from the panel & pull out


Function of the damper








Silent Drawer System

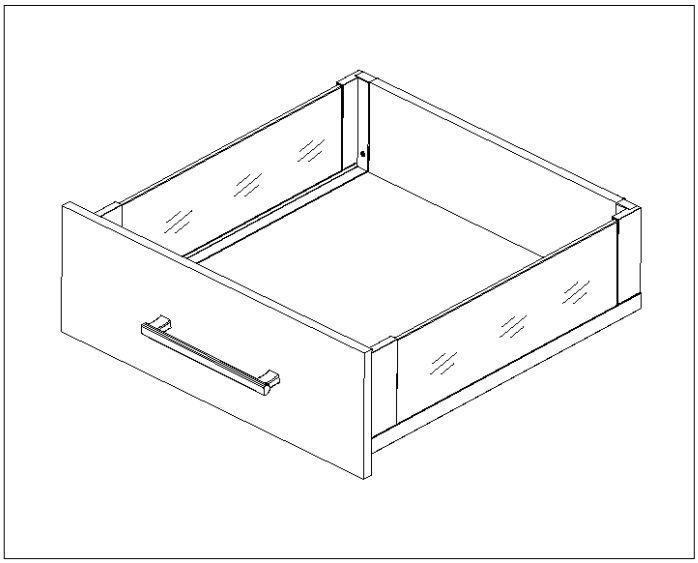


Special Features:

- Length:270,300,350,400,450,500,550mm.
- The drawer side-board is 171mm high.
- Drawer width can be designed freely with automatic error adjustment.
- Hidden full pullout silencing sliding skid can bear 35kg and enjoys
- excellent stability and quite and smooth sliding performance. Quick installation and dismantle.
- Newly-designed built-in damper is free from reinstallation and ensures soft and smooth drawer movements.


Basic length	Internally usable drawer depth	Minimum installation depth of drawer	Minimum installation height
270mm	244mm	270mm	195mm
300mm	274mm	300mm	195mm
350mm	324mm	350mm	195mm
400mm	374mm	400mm	195mm
450mm	424mm	450mm	195mm
500mm	474mm	500mm	195mm
550mm	524mm	550mm	195mm

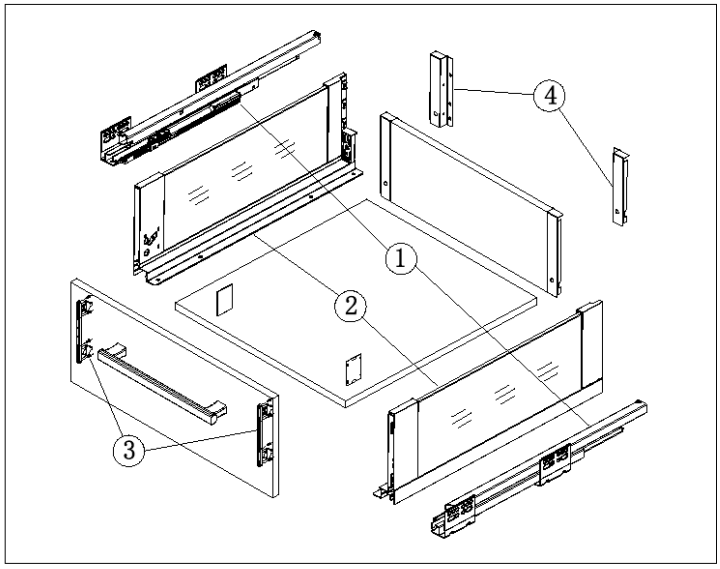


1.Guide Left/Right Length: 270mm 300mm 350mm 400mm 450mm 500mm 550mm



2.Guide Left/Right Length: 270mm 300mm 350mm 400mm 450mm 500mm 550mm




5.Front connector Left / Right



6.Back connector Left / Right



Technology pivot:
Bottom and Back Panel Measurement
16MM Density Panel

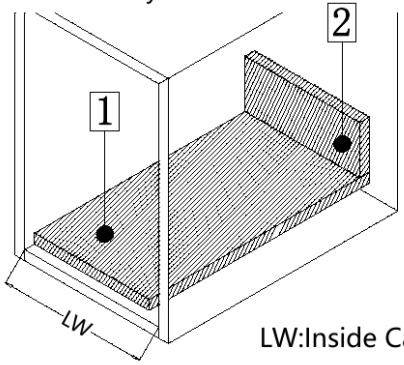


LW:Inside Cabinet Width

1 Bottom panel width=Inside Cabinet Width(LW)-75±0.5
Bottom panel length=Runner length(NL)-10MM

2 Back panel height= 151MM
Back panel width=Inside Cabinet Width(LW)-87±0.5


Runner Installation(mm)

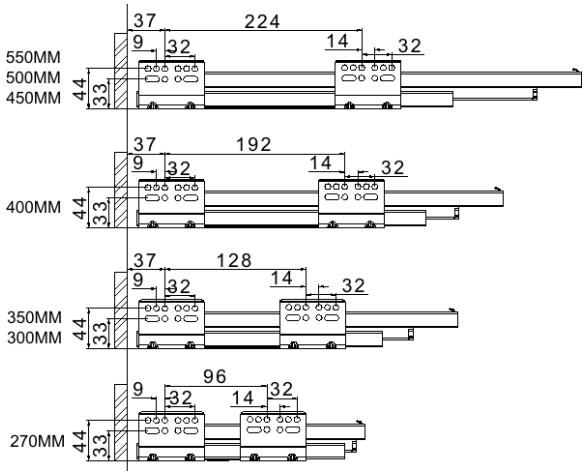


Basic length(NL):270/300/350/400/450/500/550mm

Modul Box Assembly Instruction

Inside Cabinet Dimension

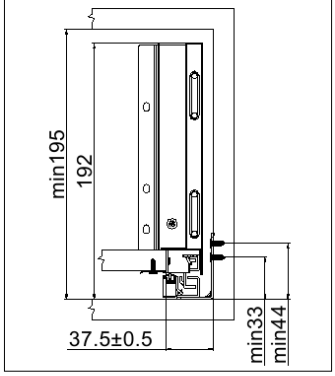


Front Panel Mounting Positions




B Side overlay(user-defined)

Front Fixing Brackets Positions




A.B Side overlay(user-defined)


Back Panel Mounting Positions



Front fixing brackets mounting




Installed panelRemember that tighten the fixing screw




Front panel removing


Take out the plastic cover




1 Loosen the fastening screws
2 Rotation to dismantle the panel




Front panel height adjustment: ±2mm




Front panel side adjustment: right1mm



Front panel side adjustment: left1mm





Back Adjustment





Twist the adjustment core to adjust the front and rear tilt of the panel

Mounting the drawer













Installing the drawer









Removing the drawer




Push the metal spring part from the panel & pull out


Function of the damper







Silent Drawer System

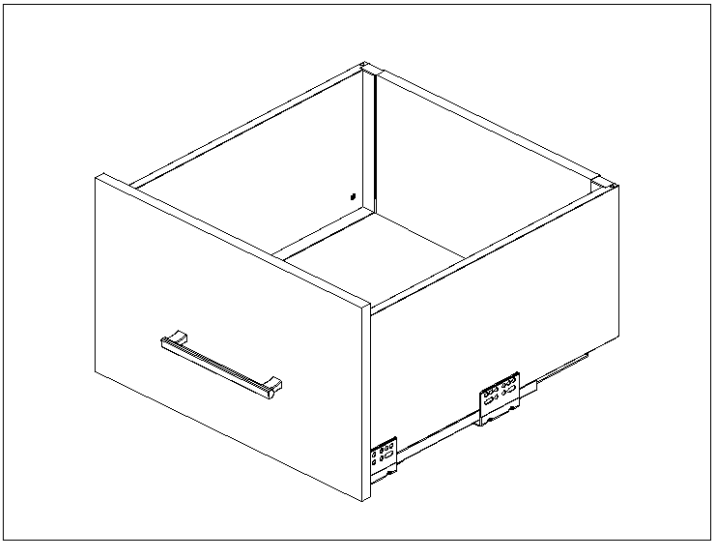


Modul Box Assembly Instruction


Special Features:

- Length:270,300,350,400,450,500,550mm.
- The drawer side-board is 203mm high.
- Drawer width can be designed freely with automatic error adjustment.
- Hidden full pullout silencing sliding skid can bear 35kg and enjoys
- excellent stability and quite and smooth sliding performance. Quick installation and dismantle.
- Newly-designed built-in damper is free from reinstallation and ensures soft and smooth drawer movements.


Basic length	Internally usable drawer depth	Minimum installation depth of drawer	Minimum installation height
270mm	244mm	270mm	227mm
300mm	274mm	300mm	227mm
350mm	324mm	350mm	227mm
400mm	374mm	400mm	227mm
450mm	424mm	450mm	227mm
500mm	474mm	500mm	227mm
550mm	524mm	550mm	227mm

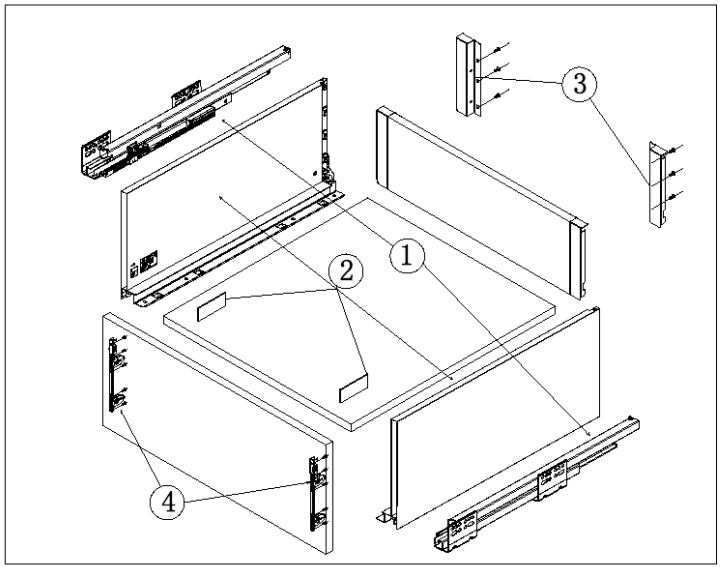


1. Guide Left/Right Length: 270mm 300mm 350mm 400mm 450mm 500mm 550mm



2.Drawer Side & Decorative Cap Left/Right Length: 270mm 300mm 350mm 400mm 450mm 500mm 550mm




3.Back connector Left / Right



4.Front connector Left / Right



Technology pivot:
Bottom and Back Panel Measurement
16MM Density Panel

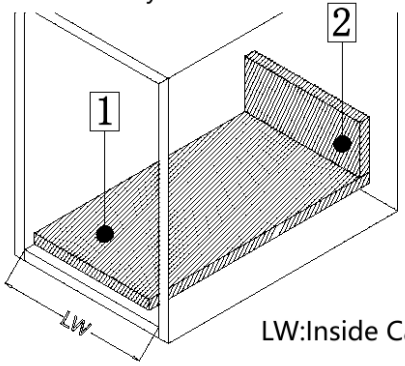


LW:Inside Cabinet Width

1 Bottom panel width=Inside Cabinet Width(LW)-75±0.5
Bottom panel length=Runner length(NL)-10MM


2 Back panel height=183MM
Back panel width=Inside Cabinet Width(LW)-87±0.5

Runner Installation(mm)

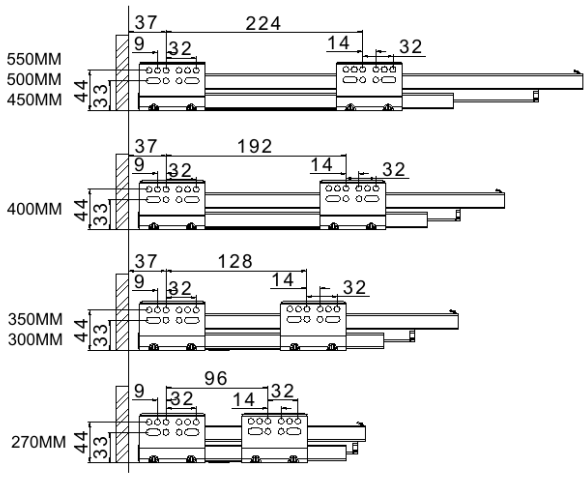


Basic length(NL):270/300/350/400/450/500/550mm

Inside Cabinet Dimension

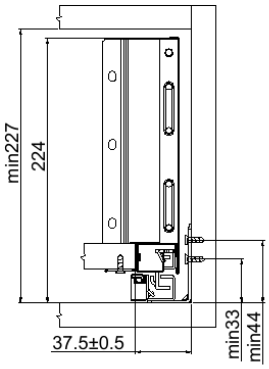


Front Panel Mounting Positions

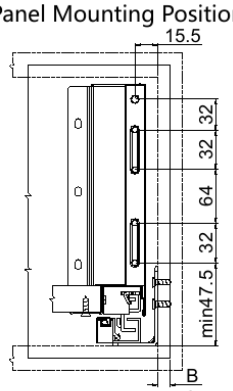


B Side overlay(user-defined)

Front Fixing Brackets Positions

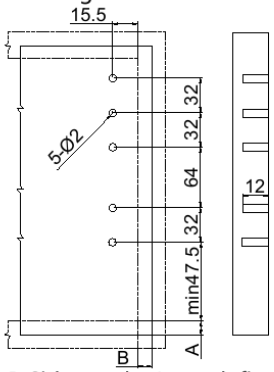


A.B Side overlay(user-defined)


Back Panel Mounting Positions



Front fixing brackets mounting




1 Installed panel emember hat tighten the fixing screw




Front panel removing


1 Take out the plastic cover




1 Loosen the fastening screws
2 Rotation to dismantle the panel




Front panel height adjustment: ±2mm




Front panel side adjustment: right1mm



Front panel side adjustment: left1mm





Back Adjustment

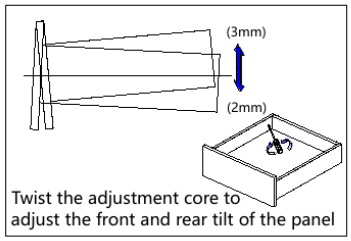



Twist the adjustment core to adjust the front and rear tilt of the panel

Mounting the drawer













Installing the drawer









Removing the drawer




Push the metal spring part from the panel & pull out


Function of the damper








Mute damping drawer system with free square bar

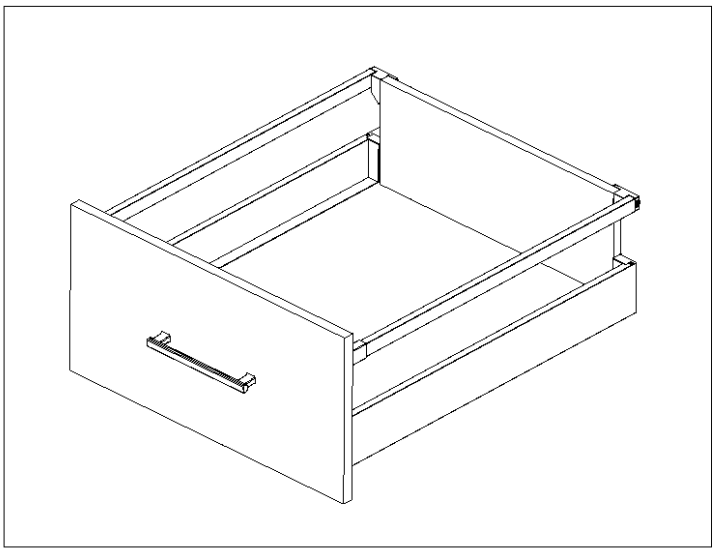


Special Features:

- Length:270.300,350,400,450,500,550mm.
- The drawer side-board is 88mm high.
- Drawer width can be designed freely with automatic error adjustment.
- Hidden full pullout silencing sliding skid can bear 35kg and enjoys
- excellent stability and quite and smooth sliding performance. Quick installation and dismantle.
- Newly-designed built-in damper is free from reinstallation and ensures soft and smooth drawer movements.


Basic length	Internally usable drawer depth	Minimum installation depth of drawer	Minimum installation height
270mm	244mm	270mm	H+42mm
300mm	274mm	300mm	H+42mm
350mm	324mm	350mm	H+42mm
400mm	374mm	400mm	H+42mm
450mm	424mm	450mm	H+42mm
500mm	474mm	500mm	H+42mm
550mm	524mm	550mm	H+42mm

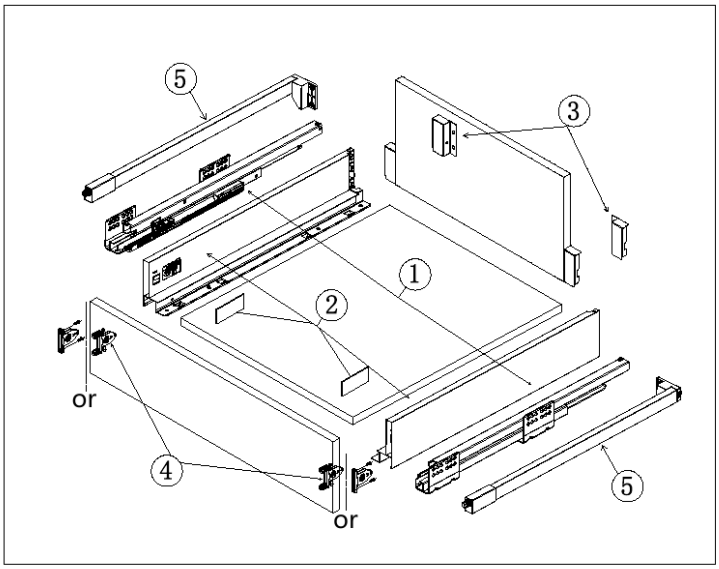


1.Guide Left/Right Length: 270mm 300mm 350mm 400mm 450mm 500mm 550mm




2.Drawer Side & Decorative Cap Left/Right Length: 270mm 300mm 350mm 400mm 450mm 500mm 550mm




3.Back connector Left / Right




4.Front connector Left / Right



5.Freedom square bar Left / Right



Technology pivot:
Bottom and Back Panel Measurement
16MM Density Panel

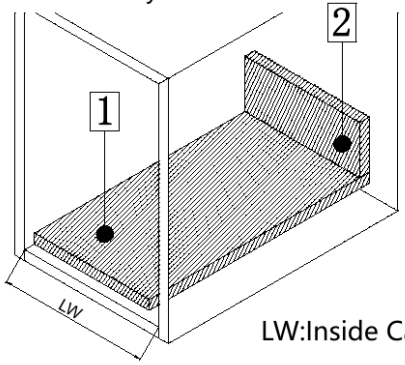


LW:Inside Cabinet Width

1 Bottom panel width=Inside Cabinet Width-75±0.5
Bottom panel length=Runner length-10MM

2 Back panel height= H ≥114(68+46)MM
Back panel width=Inside Cabinet Width-87±0.5


Runner Installation(mm)

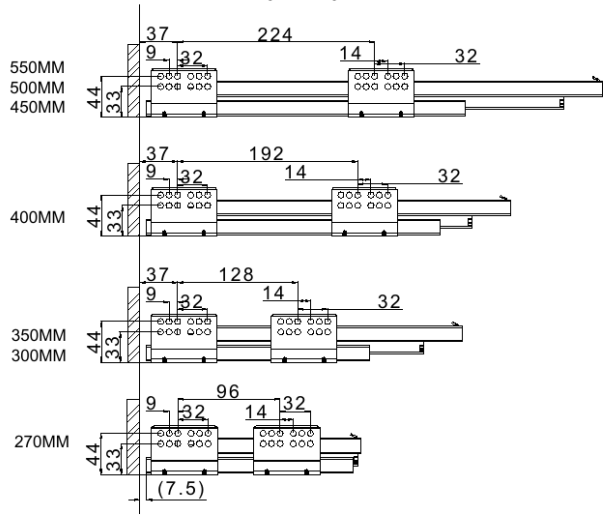


Basic length:270/300/350/400/450/500/550

Modul Box Assembly Instruction

Inside Cabinet Dimension




Front Panel Mounting Positions




B Side overlay(user-defined)

Front Fixing Brackets Positions
(L1=H-47.5)




A.B Side overlay(user-defined)


Back Panel Mounting Positions

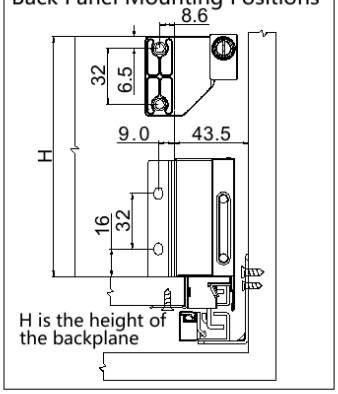

Front fixing brackets mounting




1 Installed panel
Remember that tighten the
fixing screw




Front panel removing


1 Take out the plastic cover




1 Loosen the fastening screws
2 Rotation to dismantle the panel




Front panel height adjustment: ±2mm




Front panel side adjustment: right1mm





Front panel side adjustment: left1mm







Mounting the drawer













Installing the drawer









Removing the drawer




Push the metal spring part from the
panel & pull out


Function of the damper









Assembly instruction of Q1 inner drawer system

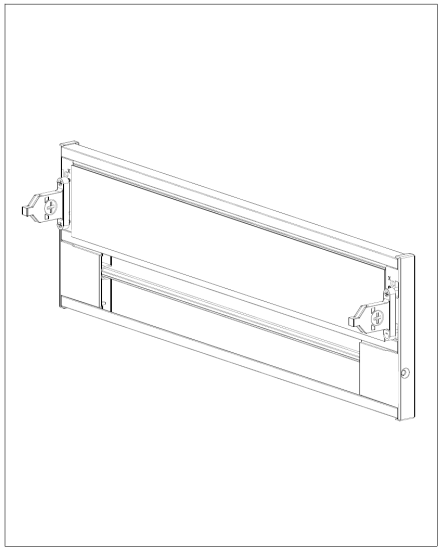

* Cutting dimension of Alu front panel*

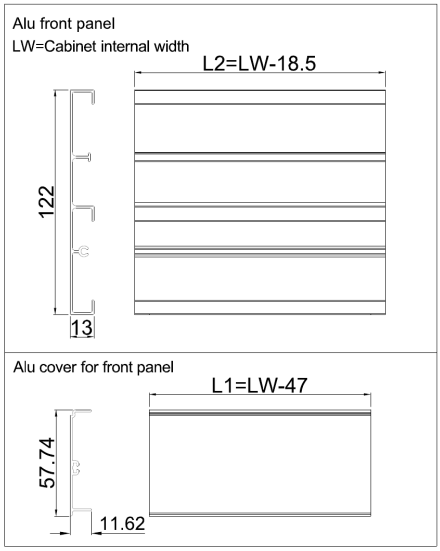


* Installation of slide*

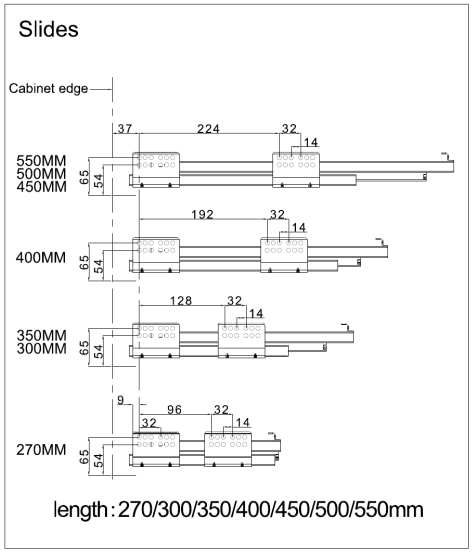


* Installation steps*


1. Install the Aluminum cover first

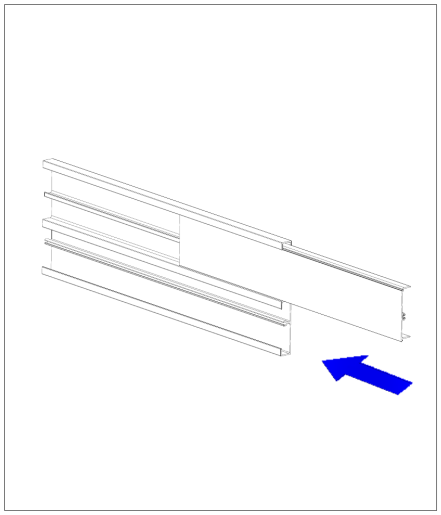


2.Choose the screw hole "Q" to fix the metal front bracket

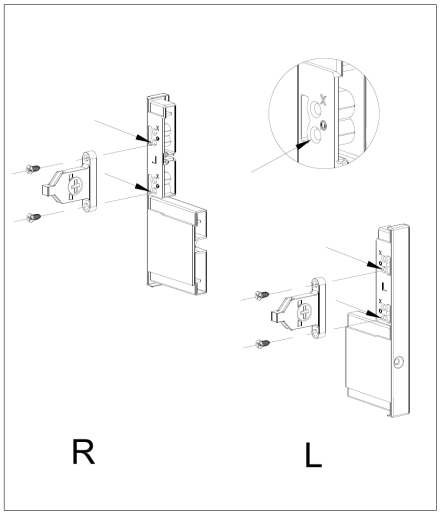


3.Combine the inner drawer front connector and front penal

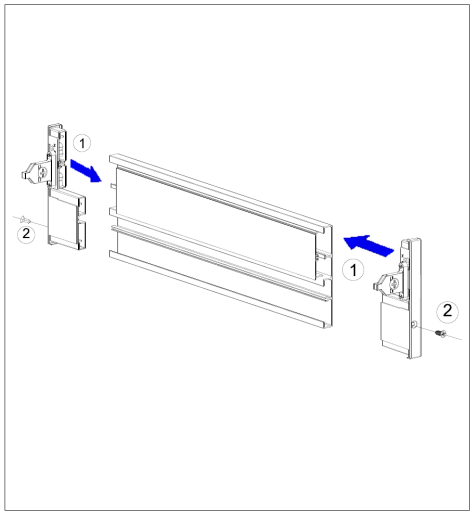


4.Finish to install the inner drawer front paofile

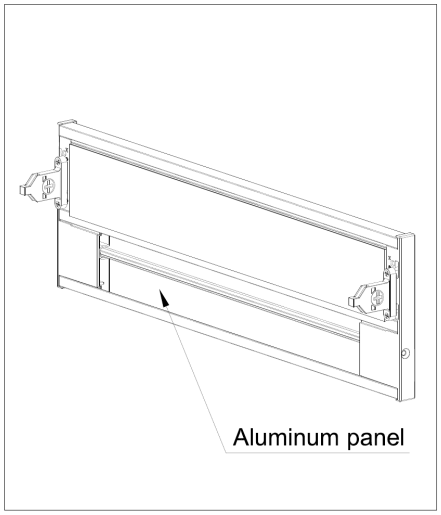


5.Combine the front profile and drawer side

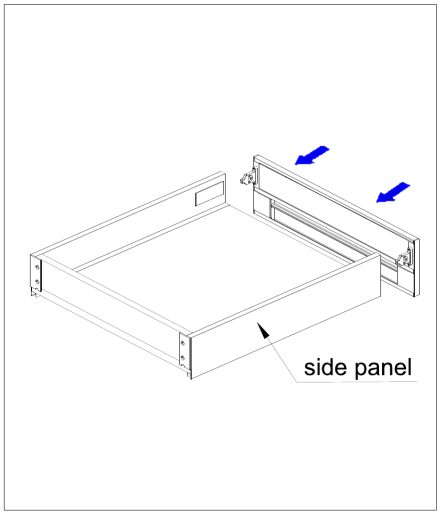


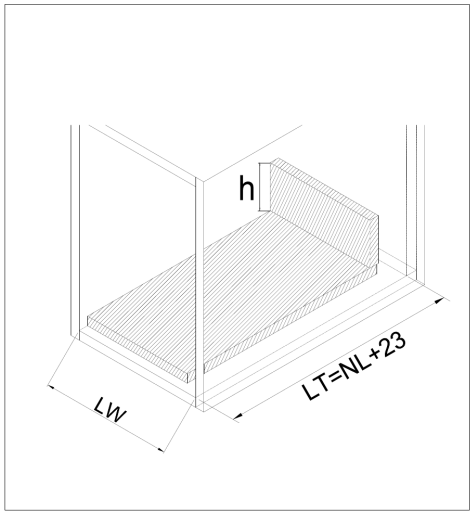


Bottom and back panel measurement

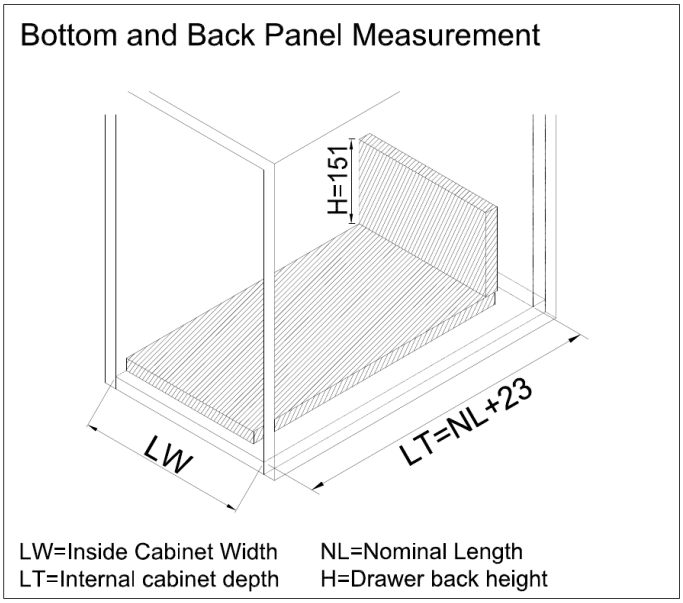


Cutting sizes

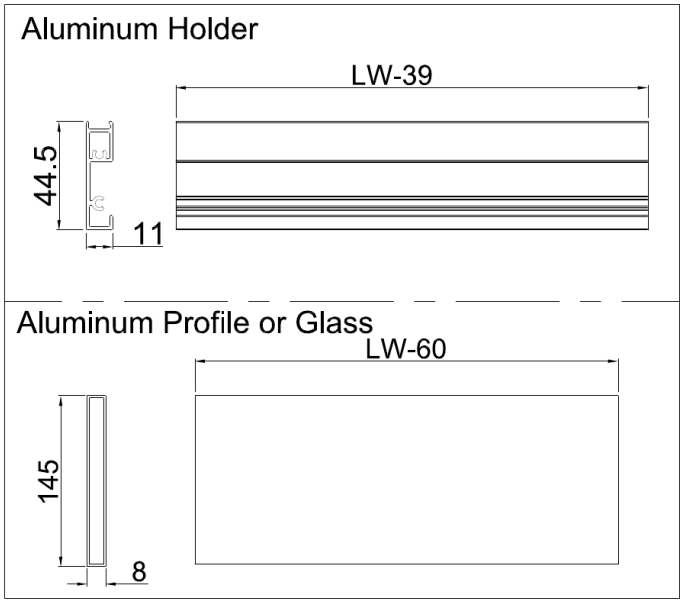


Slide installation

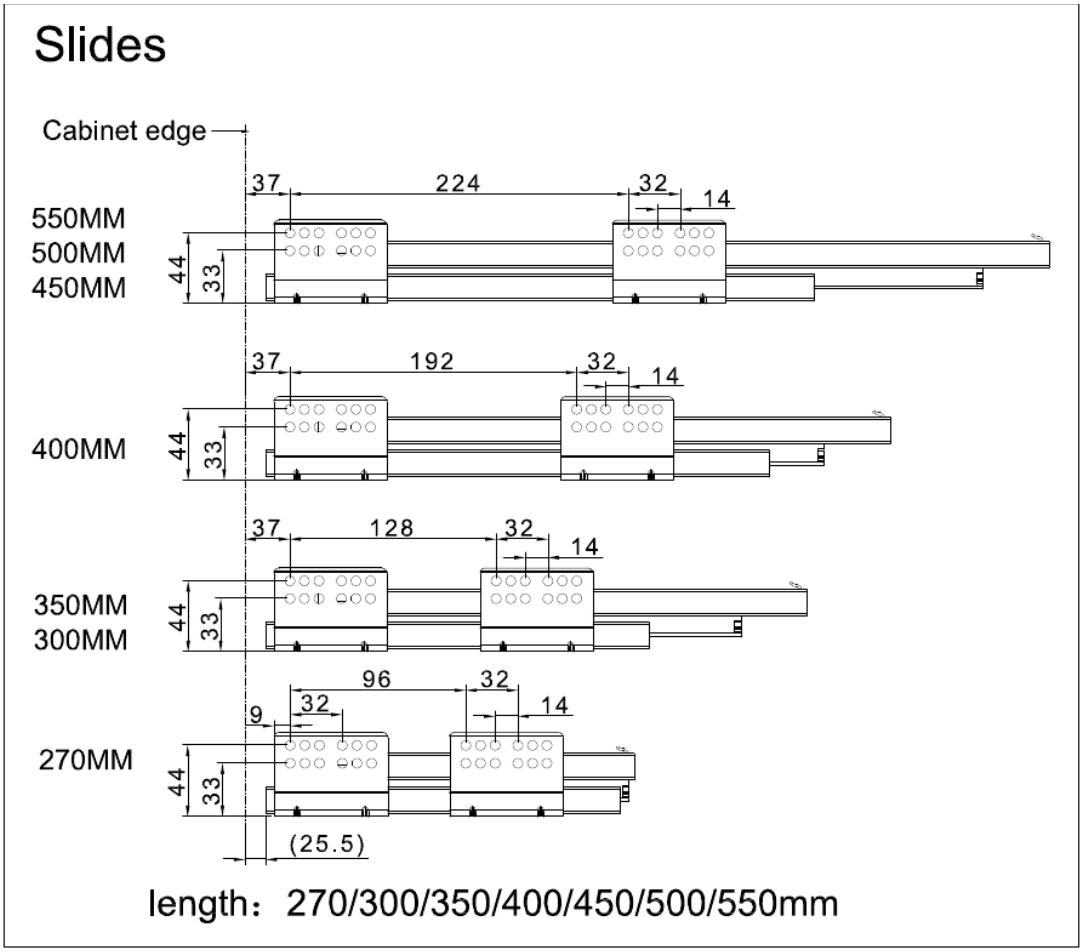

1. First insert the panel gasket, then insert the plastic joint into both sides of the aluminum plate.

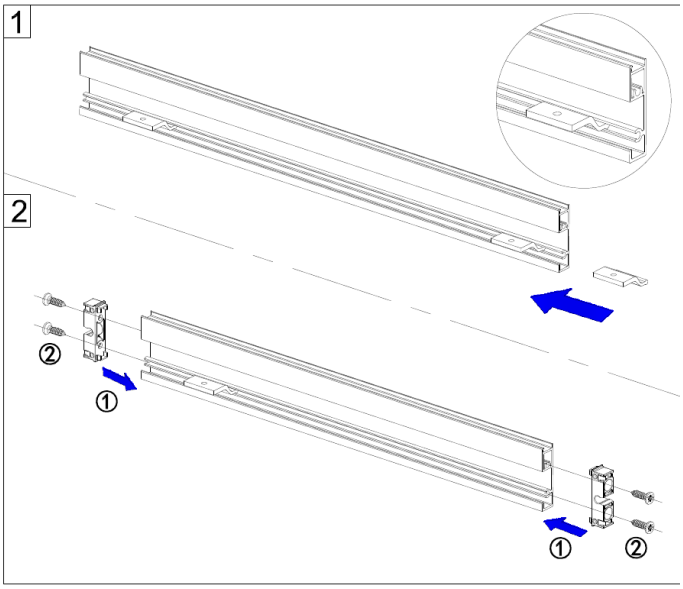

2. First assemble the front connector and front aluminum panel, then tighten the screws.

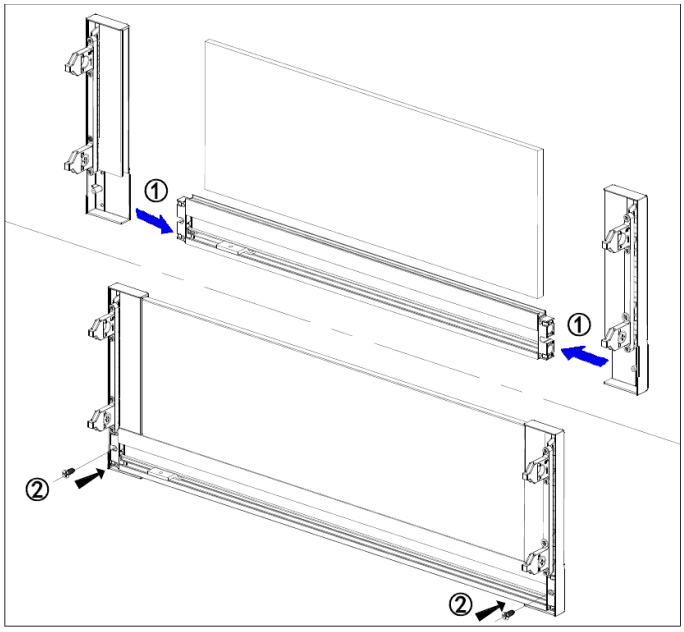

3. Assemble the completed inner glass front with the drawer sides.

